


SEAL SPEC S19-F

seal-mart | 

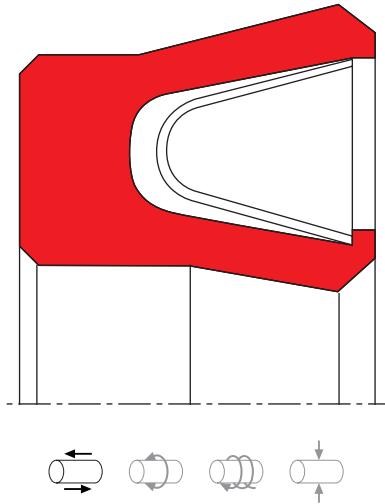

description

finger spring activated, asymmetrical PTFE rod seal, low friction and good dry running properties, excellent chemical and thermal resistance, mainly used in chemical, pharma and food industry.

- + asymmetric single-acting rod lip seal, with the dynamic sealing lip being differently shaped than the static one. the preload is created by a finger spring inserted in the groove.
- + interference fit on the outside diameter.
- + good sealing effect across a wide temperature range.
- + various materials are available for different purposes.
- + sealing effect enhanced by high recovery rate.
- + for pressures up to 200 bar as a seal between pressurised space and atmosphere (in certain cases even above, see "gap dimensions").
- + good sealing in all pressure ranges.
- + excellent static and dynamic sealing after short run-in time.
- + suitable for short and long travel.
- + no reverse leakage (i.e. minor relative motion of the sealing edges when the direction is changed).
- + little friction in dry running or in media with poor lubricating effect (in aqueous media only suitable to a limited extent).
- + low break-away load.
- + flexible sealing lip due to large spring travel.

category of profile

machined product only

single acting

the S19-F seal is designed for use as a rod seal

area of application; hydraulics


- reciprocating and swiveling pistons in cylinders, push rods, fittings in the chemical industry.

note

- special measures required when used at temperatures below -60°C , because of material shrinkage.
- considering the limited long-time rupture strength of PTFE materials, the cs/H ratio should not fall below a value of 1/1.5.
- cross-sections limited to 10 mm.
- varying the angle of the chamfer on the dynamic sealing lip allows adaptation to media (steeper angle for high viscosity media) respectively a pressure relief (flat angle).

function

S19-F profiles are lip seals designed to seal pressurised space against the atmosphere; mainly for reciprocating movements. the design is based on application in aggressive media or with high thermal demands. the operating parameters are as defined in the sealing data sheet and material data. requirements deviating from these parameters can be met to a certain degree by changing the geometry in the software program.



operating parameter & material

sealing element	material energizer	back-up ring	temperature	max surface speed	max pressure ¹	hydrolysis	dry running	wear resistance
PTFE	spring (1.4310)	-	-200 °C ... +260 °C	15 m/s	100 bar (10 MPa)	++	++	+
PTFE glass	spring (1.4310)	-	-200 °C ... +260 °C	15 m/s	160 bar (16 MPa)	++	++	+
PTFE bronze	spring (1.4310)	-	-200 °C ... +260 °C	15 m/s	160 bar (16 MPa)	++	++	+
UHMWPE	spring (1.4310)	-	-200 °C ... +80 °C	15 m/s	200 bar (20 MPa)	++	+	+

¹ pressure ratings are dependent on the size of the extrusion gap.

++ particularly suitable

+ suitable

o conditional suitable

- not suitable

the stated operation conditions represent general indications. it is recommended not to use all maximum values simultaneously. surface speed limits apply only to the presence of adequate lubrication film.

for detailed information regarding chemical resistance please refer to our "list of resistance". for decreased leakage rates elastomer materials (polyurethane or rubber) in other sealing systems are to be preferred.

gap dimension

operating pressure	cs = (∅D - ∅d)/2 mm			
	2	5	7,5	10
safe extrusion gap (mm)				
50 bar (5 MPa)	0,16	0,35	0,55	0,67
100 bar (10 MPa)	0,10	0,25	0,40	0,50
150 bar (15 MPa)	0,08	0,21	0,35	0,43
200 bar (20 MPa)	0,07	0,20	0,33	0,40

the above data are maximum value and can't be used at the same time. e.g. the maximum operating speed depend on material type, pressure, temperature and gap value. temperature range also dependent on medium.

the table refers to a operating temperature of 80°C. temperatures below may increase the safe extrusion gap slightly, at temperatures above 80 °C, the gap dimensions has to be reduced or a stronger profile selected.

in exceptional cases, a pressure above the limit of 200 bar is possible, the safe extrusion gap is the result of the tolerance pair H8/f8, influences due to thermal expansion have to be considered. we also recommend contacting our application engineering department.

surface quality

surface roughness	Rtmax (µm)	Ra (µm)
sliding surface	≤2,0	≤0,05-0,3
bottom of groove	≤10	≤1,6
groove face	≤10	≤1,6

tolerance recommendation

seal housing tolerance	
∅d	h10
∅D	H9


mode of installation

normally a open housing should be designed. the profile should not be snapped in, the spring may be damaged and a faultless function can not be ensured. in special cases a snap-in installation is possible, therefore the housing has to be designed accordingly. the seal can only be held by a retaining housing step, having a width of 0.25·CS and a distinctive 30° chamfer, all edges must be rounded. the smallest possible diameter for such a snap-in installation is 10·CS.

insertion chamfer


in order to avoid damage to the rod seal during installation, the piston rod is to be chamfered and rounded as shown in the "recommended mounting space" drawing. the size of chamfer depends on the seal type and profile width.

cs (mm)	c (mm)	
	α = 15° ... 20°	α = 20° ... 30°
2	2	1
3	3	1,5
4	3,5	2
5	4	2,5
6	4,5	3
7,5	5	4
10	6	5



SEAL SPEC S19-F


recommended mounting space

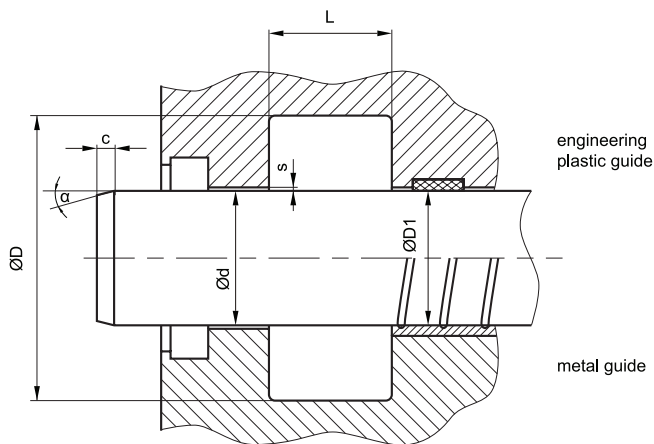

recommended guide tolerance D1


d f8 [mm]	p ≤ 100 [bar]	100 < p ≤ 200 [bar]	p > 200 [bar]
≤ 100	H10	H8	H8
> 100 ≤ 200	H10	H8	H7
> 200	H9	H8	H7

fitted

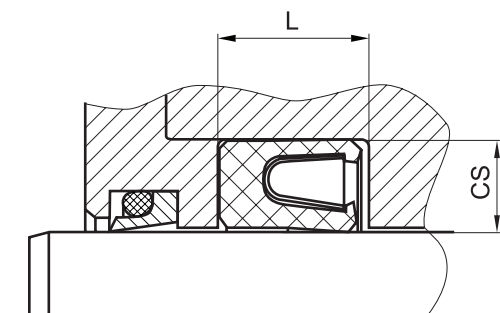

seal & housing recommendations

please note that we are able to produce those profiles to your specific need or any non standard housing. for detail measurements, please see seal-mart catalog...

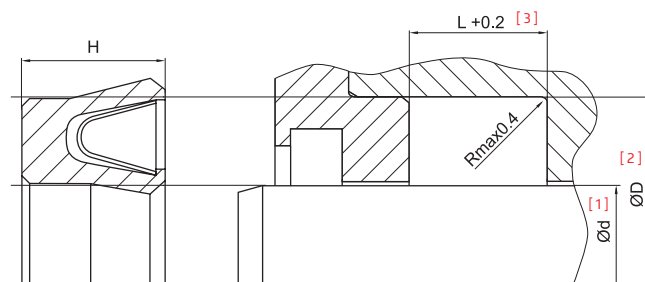

with PTFE materials, the profile size does not so much depend on the seal diameter but rather on pressure and extrusion gap. this relationship is described under "gap dimensions". nominal widths not shown in the diagram can be interpolated if required.

L [mm]	cs = (ØD - Ød)/2 [mm]
[3] 3,5	2
5,1	3
6,5	4
8,8	5
10,2	6
12,8	7,5
17	10

the ratio between nominal width and seal height cs/H should not drop below 1/125. therefore we recommend the following housing heights.

